



coldyfor
COOLING SYSTEMS

Split Systems
Monoblocks

Coldyfor it's a Boxcold UK Project

Contact Us: +44 (0) 1256 647088

www.boxcold.co.uk | Address: Unit 1, Lodge Farm, North Warnborough, Hook RG29 1HA

PRICE LIST
2025

Wall monoblocks
Air condensation
R452A
Medium temperature



UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. 0°		AMB.T. +38° COLDROOM T. 0°		AMB.T. +43° COLDROOM T. 0°		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	Ø	N°	Ø	N°	[W]	[m3]	[W]	[m3]	[W]	[m3]	W	D	H	€
IPAM401A	AE4450Z-FZ	1/3	8,85	220/50Hz	-	4,2	610	254	1	254	1	820	4,9	750	3,7	680	3,1	400	922	800	2.000,00 €
IPAM402A	AE4460Z-FZ	1/2	10,33	220/50Hz	-	3,5	700	254	1	254	1	960	6,2	880	4,7	810	4,2	400	922	800	2.050,00 €
IPAM403A	AE4470Z-FZ	5/8	12,01	220/50Hz	-	3,6	770	254	1	254	1	1140	8,0	1050	6,2	970	5,5	400	922	800	2.200,00 €
IPAM404A	CAJ9480Z-FZ	3/4	15,2	220/50Hz	-	3,7	780	254	1	254	1	1240	10,1	1130	7,0	1030	6,0	400	922	800	2.300,00 €
IPAM405A	CAJ9510Z-FZ	1	18,3	220/50Hz	-	4,3	900	254	1	254	1	1490	11,8	1360	9,1	1240	8,0	400	922	800	2.400,00 €
IPAM601A	CAJ9510Z-FZ	1	18,3	220/50Hz	-	5	1070	300	1	300	1	1670	13,8	1520	10,8	1390	9,4	600	1004	800	2.700,00 €
IPAM602A	CAJ9513Z-FZ	1	24,2	220/50Hz	-	6	1235	300	1	300	1	2100	18,8	1900	14,8	1730	12,9	600	1004	800	2.800,00 €
IPAM603A	CAJ4517Z-FZ	1,2	25,95	220/50Hz	-	6,6	1335	300	1	300	1	2320	21,5	2120	17,2	1940	15,2	600	1004	800	3.100,00 €
IPAM603A	TAJ4517Z-TZ	1,2	25,95	-	400/50Hz	2,3	1335	300	1	300	1	2320	21,5	2120	17,2	1940	15,2	600	1004	800	3.300,00 €
IPAM604A	CAJ4519Z-FZ	1,5	34,45	220/50Hz	-	8	1810	300	1	300	1	2710	26,4	2470	21,2	2270	18,8	600	1004	800	3.200,00 €
IPAM604A	TAJ4519Z-TZ	1,5	34,45	-	400/50Hz	2,8	1810	300	1	300	1	2710	26,4	2470	21,2	2270	18,8	600	1004	800	3.400,00 €
IPAM801A	CAJ4519Z-FZ	1,5	34,45	220/50Hz	-	8,5	2025	300	2	300	2	3250	33,2	2960	26,9	2700	23,8	800	1154	800	3.700,00 €
IPAM801A	TAJ4519Z-TZ	1,5	34,45	-	400/50Hz	3	2025	300	2	300	2	3250	33,2	2960	26,9	2700	23,8	800	1154	800	3.900,00 €
IPAM802A	FH4524Z-XC	2	43,3	220/50Hz	-	12	1935	300	2	300	2	3540	37,1	3180	29,5	2880	26,0	800	1154	800	3.800,00 €
IPAM802A	TFH4524Z-XG	2	43,3	-	400/50Hz	5	1935	300	2	300	2	3540	37,1	3180	29,5	2880	26,0	800	1154	800	4.000,00 €



Wall monoblocks
Air condensation
R452A
Low temperature

UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. -20°		AMB.T. +38° COLDROOM T. -20°		AMB.T. +43° COLDROOM T. -20°		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	Ø	N°	Ø	N°	[W]	[m3]	[W]	[m3]	[W]	[m3]	W	D	H	€
IPAL401A	CAJ2440Z-FZ	1,15	22,5	220/50HZ	-	4	690	254	1	254	1	710	3,7	650	2,6	590	2,1	400	922	800	2.550,00 €
IPAL402A	CAJ2446Z-FZ	1,3	26,5	220/50Hz	-	4,5	905	254	1	254	1	910	6,1	820	4,1	740	3,3	400	922	800	2.700,00 €
IPAL403A	CAJ2464Z-FZ	1,25	26,2	220/50Hz	-	6	1125	254	1	254	1	1070	7,9	970	5,6	890	4,8	400	922	800	2.750,00 €
IPAL601A	CAJ2464Z-FZ	1,25	26,2	220/50Hz	-	6	1180	300	1	300	1	1270	11,0	1150	7,7	1040	6,4	600	1004	800	3.100,00 €
IPAL602A	FH2480Z-XC	2	54,3	220/50Hz	-	8	2315	300	1	300	1	1760	18,9	1500	12,3	1340	10,1	600	1004	800	3.600,00 €
IPAL602A	TFH2480Z-XG	2	54,3	-	400/50Hz	2,3	2315	300	1	300	1	1760	18,9	1500	12,3	1340	10,1	600	1004	800	3.800,00 €
IPAL801A	FH2480Z-XC	2	54,3	220/50Hz	-	12,6	2195	300	2	300	2	2070	24,7	1810	17,1	1630	14,3	800	1154	800	4.000,00 €
IPAL801A	TFH2480Z-XG	2	54,3	-	400/50Hz	3,7	2195	300	2	300	2	2070	24,7	1810	17,1	1630	14,3	800	1154	800	4.200,00 €
IPAL802A	FH2511Z-XC	3	68	220/50Hz	-	13,8	3020	300	2	300	2	2470	32,8	2110	22,3	1880	18,3	800	1154	800	4.200,00 €
IPAL802A	TFH2511Z-XG	3	68	-	400/50Hz	4,5	3020	300	2	300	2	2470	32,8	2110	22,3	1880	18,3	800	1154	800	4.400,00 €

Wall monoblocks
Air condensation
R455A
Medium temperature



UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. 0°		AMB.T. +38° COLDROOM T. 0°		AMB.T. +43° COLDROOM T. 0°		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	Ø	N°	Ø	N°	[W]	[m3]	[W]	[m3]	[W]	[m3]	W	D	H	€
IPAM401C	AE4450P-FZ	1/3	8,85	220/50Hz	-	4,2	610	254	1	254	1	873	6,0	796	5,1	728	4,0	400	922	800	2.190,00 €
IPAM402C	AE4460P-FZ	1/2	10,33	220/50Hz	-	3,5	700	254	1	254	1	990	8,0	909	6,7	837	5,7	400	922	800	2.200,00 €
IPAM403C	AE4470P-FZ	5/8	12,01	220/50Hz	-	3,6	770	254	1	254	1	1180	10,0	1089	9,3	1008	7,8	400	922	800	2.350,00 €
IPAM404C	CAJ9480P-FZ	3/4	15,2	220/50Hz	-	3,7	780	254	1	254	1	1350	12,0	1229	10,2	1124	8,2	400	922	800	2.500,00 €
IPAM405C	CAJ9510P-FZ	1	18,3	220/50Hz	-	4,3	900	254	1	254	1	1650	16,0	1498	13,8	1367	11,5	400	922	800	2.600,00 €
IPAM602C	CAJ9513P-FZ	1	24,2	220/50Hz	-	6	1235	300	1	300	1	2105	20,0	1908	18,9	1736	15,9	600	1004	800	2.800,00 €
IPAM603C	CAJ4517P-FZ	1,2	25,95	220/50Hz	-	6,6	1335	300	1	300	1	2330	24,0	2124	20,6	1946	16,8	600	1004	800	3.100,00 €
IPAM603C	TAJ4517P-TZ	1,2	25,95	-	400/50Hz	2,3	1335	300	1	300	1	2330	24,0	2124	20,6	1946	16,8	600	1004	800	3.300,00 €
IPAM604C	CAJ4519P-FZ	1,5	34,45	220/50Hz	-	8	1810	300	1	300	1	2950	32,0	2695	26,6	2468	22,6	600	1004	800	3.300,00 €
IPAM604C	TAJ4519P-TZ	1,5	34,45	-	400/50Hz	2,8	1810	300	1	300	1	2950	32,0	2695	26,6	2468	22,6	600	1004	800	3.500,00 €
IPAM802C	FH4524P-XC	2	43,3	220/50Hz	-	12	1935	300	2	300	2	3970	44,0	3569	34,8	3231	29,3	800	1154	800	4.000,00 €
IPAM802C	TFH4524P-XG	2	43,3	-	400/50Hz	5	1935	300	2	300	2	3970	44,0	3569	34,8	3231	29,3	800	1154	800	4.100,00 €
IPAM803C	FH4532P-XC	2,5	50,6	220/50Hz	-	14	2084	300	2	300	2	4730	52,0	4252	42,2	3850	32,5	800	1154	800	4.100,00 €
IPAM803C	TFH4532P-XG	2,5	50,6	-	400/50Hz	6	2084	300	2	300	2	4730	52,0	4252	42,2	3850	32,5	800	1154	800	4.200,00 €



Wall monoblocks
Air condensation
R455A
Low temperature

UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. -20°		AMB.T. +38° COLDROOM T. -20°		AMB.T. +43° COLDROOM T. -20°		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	∅	N°	∅	N°	[W]	[m3]	[W]	[m3]	[W]	[m3]	W	D	H	€
IPAL401C	CAJ2440P-FZ	1,15	22,5	220/50HZ	-	4	690	254	1	254	1	717	5,0	653	3,8	594	3,2	400	922	800	2.650,00 €
IPAL402C	CAJ2446P-FZ	1,3	26,5	220/50Hz	-	4,5	905	254	1	254	1	915	7,0	825	6,2	746	4,9	400	922	800	2.750,00 €
IPAL403C	CAJ2464P-FZ	1,25	26,2	220/50Hz	-	6	1125	254	1	254	1	1108	9,0	1011	7,6	924	6,0	400	922	800	2.850,00 €
IPAL601C	CAJ2464P-FZ	1,25	26,2	220/50Hz	-	6	1180	300	1	300	1	1302	12,0	1184	10,6	1079	8,9	600	1004	800	3.200,00 €
IPAL602C	FH2480P-XC	2	54,3	220/50Hz	-	8	2315	300	1	300	1	1822	19,0	1571	14,9	1415	10,9	600	1004	800	3.700,00 €
IPAL602C	TFH2480P-XG	2	54,3	-	400/50Hz	2,3	2315	300	1	300	1	1822	19,0	1571	14,9	1415	10,9	600	1004	800	3.900,00 €
IPAL801C	FH2480P-XC	2	54,3	220/50Hz	-	12,6	2195	300	2	300	2	2126	29,0	1870	22,3	1686	19,5	800	1154	800	4.100,00 €
IPAL801C	TFH2480P-XG	2	54,3	-	400/50Hz	3,7	2195	300	2	300	2	2126	29,0	1870	22,3	1686	19,5	800	1154	800	4.300,00 €
IPAL802C	FH2511P-XC	3	68	220/50Hz	-	13,8	3020	300	2	300	2	2544	38,0	2201	32,8	1974	26,8	800	1154	800	4.200,00 €
IPAL802C	TFH2511P-XG	3	68	-	400/50Hz	4,5	3020	300	2	300	2	2544	38,0	2201	32,8	1974	26,8	800	1154	800	4.400,00 €

Wall monoblocks
Air condensation
R290
Medium temperature




UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. 0°		AMB.T. +38° COLDROOM T. 0°		AMB.T. +43° COLDROOM T. 0°		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	∅	N°	∅	N°	[W]	[m3]	[W]	[m3]	[W]	[m3]	W	D	H	€
IPAM401B	1 X NEU6214U	3/4	12,11	220/50Hz	-	2,8	520	254	1	254	1	991	8,0	927	6,3	875	4,5	400	922	800	2.200,00 €
IPAM402B	1 X NEU6220U	3/4	16,8	220/50Hz	-	3,5	640	254	1	254	1	1307	12,0	1224	9,3	1157	6,6	400	922	800	2.400,00 €
IPAM403B	1 X NT6224U	1	22,37	220/50Hz	-	4	750	254	1	254	1	1645	18,0	1525	13,4	1433	8,7	400	922	800	2.900,00 €
IPAM601B	1 X NT6230U	1,25	27,8	220/50Hz	-	6,5	1200	300	1	300	1	2161	24,0	2011	18,3	1893	12,5	600	1004	800	3.100,00 €
IPAM801B	2 X NEU6220U	3/4	16,8	220/50Hz	-	8,1	1490	300	2	300	2	2614	30,0	2448	24,1	2315	18,2	800	1154	800	3.550,00 €
IPAM802B	2 X NT6224U	1	22,37	220/50Hz	-	10,9	2000	300	2	300	2	3289	42,0	3051	33,4	2867	24,7	800	1154	800	4.350,00 €
IPAM803B	2 X NT6230U	1,25	27,8	220/50Hz	-	13,2	2440	300	2	300	2	4321	55,0	4022	45,1	3786	35,1	800	1154	800	4.500,00 €



Wall monoblocks
Air condensation
R290
Low temperature


UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. -20°		AMB.T. +38° COLDROOM T. -20°		AMB.T. +43° COLDROOM T. -20°		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	Ø	N°	Ø	N°	[W]	[m3]	[W]	[m3]	[W]	[m3]	W	D	H	€
IPAL401B	1 X NEU2178U	1	18,7	220/50Hz	-	4	690	254	1	254	1	689	4,5	626	3,6	588	2,6	400	922	800	2.600,00 €
IPAL402B	1 X NT2210U	1	27,8	220/50Hz	-	4,5	905	254	1	254	1	959	8,0	844	6,3	783	4,5	400	922	800	2.700,00 €
IPAL601B	1 X NTX2213U	1,5	33,42	220/50Hz	-	6,5	1200	300	1	300	1	1300	12,0	1178	9,3	1103	6,5	600	1004	800	3.200,00 €
IPAL801B	2 X NT2180U	1	22,37	220/50Hz	-	7,1	1300	300	2	300	2	1483	15,0	1293	11,3	1195	7,6	800	1154	800	3.500,00 €
IPAL802B	2 X NT2210U	1	27,8	220/50Hz	-	9,8	1800	300	2	300	2	2157	29,0	1939	22,4	1802	15,7	800	1154	800	4.100,00 €
IPAL803B	2 X NTX2213U	1,5	33,4	220/50Hz	-	10,2	2300	300	2	300	2	2600	38,0	2357	29,7	2206	21,4	800	1154	800	4.700,00 €

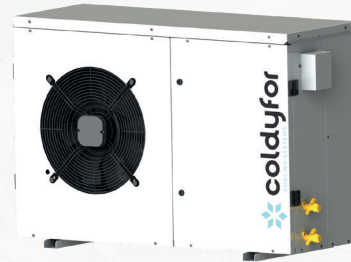

Split system condensing unit
+ Air condensation evaporator
Valve expansion
R452A/R448A/R449A/R404A
Medium temperature

UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		CONDENSER FAN		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. 0°		AMB.T. +43° COLDROOM T. 0°		PIPES DIAMETER		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	Ø	N°	Ø	N°	[W]	[m3]	[W]	[m3]	D	R	W	D	H	€
ISSM011AET	AE4450Z-FZ	1/3	8,85	220/50Hz	-	3,2	640	350	1	250	1	844	4,6	712	3,5	10	10	870	450	605	2.400,00 €
ISSM021AET	AE4460Z-FZ	1/2	10,33	220/50Hz	-	3,6	720	350	1	250	1	1035	6,9	869	5,1	10	10	870	450	605	2.450,00 €
ISSM031AET	AE4470Z-FZ	5/8	12,01	220/50Hz	-	4,3	870	350	1	250	1	1149	7,7	975	5,7	10	10	870	450	605	2.500,00 €
ISSM041AET	CAJ9480Z-FZ	3/4	15,2	220/50Hz	-	4,4	935	350	1	250	2	1399	10,7	1170	7,8	10	12	870	450	605	2.900,00 €
ISSM051AET	CAJ9510Z-FZ	1	18,3	220/50Hz	-	5,11	1085	350	1	250	2	1716	14,2	1432	10,2	10	12	870	450	605	3.100,00 €
ISSM061AET	CAJ9513Z-FZ	1	24,2	220/50Hz	-	6,02	1282	350	1	250	3	2232	18,9	1844	13,8	10	12	870	450	605	3.300,00 €
ISSM071AET	CAJ4517Z-FZ	1,2	25,95	220/50Hz	-	6,9	1420	350	1	250	3	2389	21,8	1989	15,9	10	16	870	450	605	3.900,00 €
ISSM072AET	TAJ4517Z-TZ	1,2	25,95	-	400/50Hz	4,2	1480	350	1	250	3	2389	21,8	1989	15,9	10	16	870	450	605	4.400,00 €
ISSM081AET	CAJ4519Z-FZ	1,5	34,45	220/50Hz	-	9,36	1945	350	1	300	2	3112	30,6	2599	22,6	10	16	870	450	605	5.200,00 €
ISSM082AET	TAJ4519Z-TZ	1,5	34,45	-	400/50Hz	5,31	1881	350	1	300	2	3112	30,6	2599	22,6	10	16	870	450	605	5.800,00 €
ISSM091AET	FH4524Z-XC	2	43,3	220/50Hz	-	8,3	1950	400	1	300	2	3558	35,0	2886	25,0	10	16	1155	450	750	5.400,00 €
ISSM092AET	TFH4524Z-XG	2	43,3	-	400/50Hz	5,45	2060	400	1	300	2	3558	35,0	2886	25,0	10	16	1155	450	750	6.000,00 €
ISSM101AET	FH4532Z-XC	2	50,6	220/50Hz	-	9,4	2400	400	1	300	2	4411	40,3	3645	29,3	10	16	1155	450	750	5.700,00 €
ISSM102AET	TFH4532Z-XG	3	50,6	-	400/50Hz	6,26	2482	400	1	300	2	4411	40,3	3645	29,3	10	16	1155	450	750	6.200,00 €
ISSM111AET	FH4538Z-XC	3	63	220/50Hz	-	10,5	3500	450	1	300	3	5793	70,9	4804	52,4	10	16	1360	650	890	7.000,00 €
ISSM112AET	TFH4538Z-XG	3	63	-	400/50Hz	8,89	3277	450	1	300	3	5793	70,9	4804	52,4	10	16	1360	650	890	8.000,00 €

Split system condensing unit
+ Air condensation evaporator
Valve expansion
R452A/R448A/R449A/R404A
Low temperature

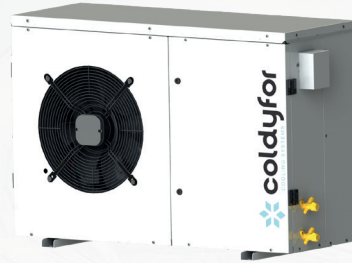

UNIT CODE	COMP. MODEL	HP	cm ³	SUPPLY VOLTAGE		POWER CONSUMP.		FAN CONDENSER		EVAPORATOR FAN		AMB.T. +32° COLDROOM T. -20°		AMB.T. +43° COLDROOM T. -20°		PIPES DIAMETER		DIMENSIONS			PRICE
				Monophase	Triphase	(A)	WATT	∅	N°	∅	N°	[W]	[m3]	[W]	[m3]	D	R	W	D	H	€
ISSL011AET	CAJ2440Z-FZ	1,15	22,5	220/50Hz	-	4	690	350	1	250	1	743	4,5	615	3,2	10	12	870	450	605	2.950,00 €
ISSL021AET	CAJ2446Z-FZ	1,25	26,5	220/50Hz	-	5	860	350	1	250	2	1026	7,5	841	4,9	10	12	870	450	605	3.100,00 €
ISSL031AET	CAJ2464Z-FZ	1,5	34,5	220/50Hz	-	6,5	1190	350	1	250	2	1269	10,3	1051	7,0	10	16	870	450	605	3.800,00 €
ISSL041AET	FH2480Z-XC	2	54,3	220/50Hz	-	8	2300	400	1	300	2	1992	23,9	1546	14,9	10	16	1155	450	750	4.600,00 €
ISSL042AET	TFH2480Z-XG	2	54,3	-	400/50Hz	4,3	1538	400	1	300	2	1992	23,9	1546	14,9	10	16	1155	450	750	5.100,00 €
ISSL051AET	FH2511Z-XC	3	68	220/50Hz	-	9	2500	400	1	300	2	2654	32,8	2041	20,8	10	16	1155	450	750	5.200,00 €
ISSL052AET	TFH2511Z-XG	3	68	-	400/50Hz	5,45	1920	400	1	300	2	2654	32,8	2041	20,8	10	16	1155	450	750	5.700,00 €



Coldyfor it's a Boxcold UK Project

Contact Us: +44 (0) 1256 647088

www.boxcold.co.uk

Address: Unit 1, Lodge Farm, North Warnborough, Hook RG29 1HA